



ARCHITECTURAL MEMBRANE series

SUITABLE FOR ARCHITECTURAL MEMBRANE
VARIOUS HARSH ENVIRONMENTS

About Our Customers

We strive to provide you with the highest quality products to satisfy you and build trust with you.


Style and Color



Light Blue



Green

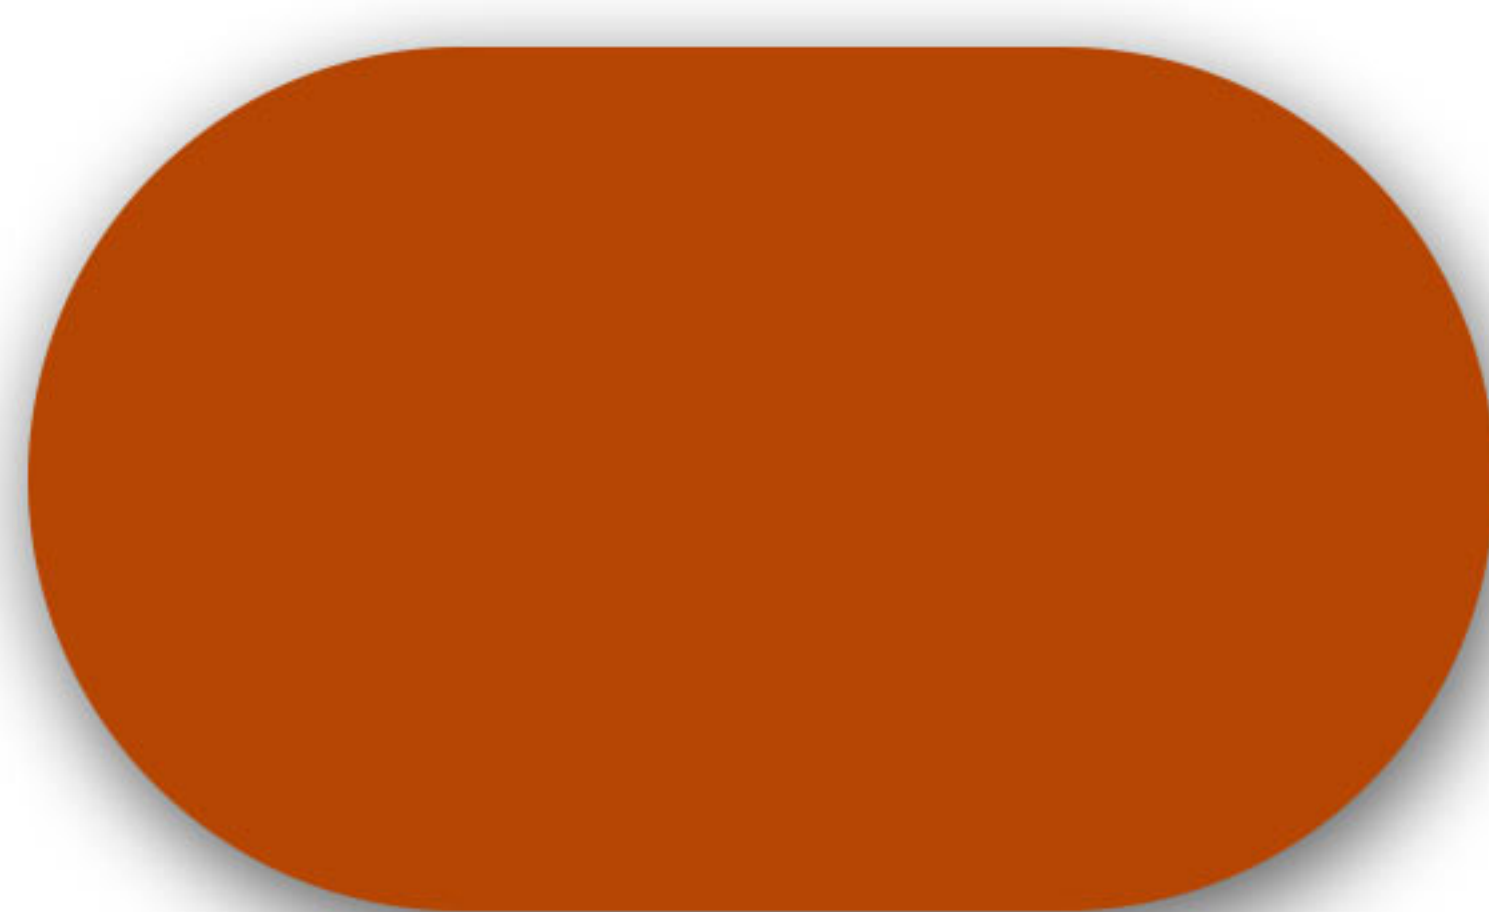

Orange



White



Grey



Khaki

Product Features



UV Resistant



Strong & Durable



PVDF Lacquering



Flexible

Technical Parameters

	Total Weight	Base Fabric	Tensile Strength (DIN 53 354)	Tearing Strength (DIN 53 363)	Adhesion (DIN 53 357)	Width	Temperature Resistance	Flame Retardancy	Lacquering	Application
X10-000006	900g/m ² 26 OZ/YD ²	1000D 30×32/inch	4000/3500 N/5cm	300/250 N/5cm	120 N/5cm	3m	-30°C / -70°C	B1	PVDF/Acrylic	Architectural Membrane
X10-000007	1000g/m ² 29 OZ/YD ²	1000D 30×32/inch	4000/3500 N/5cm	300/250 N/5cm	120 N/5cm	3m	-30°C / -70°C	B1	PVDF/Acrylic	Architectural Membrane
X10-000008	1050g/m ² 30 OZ/YD ²	1300D 30×32/inch	5000/4500 N/5cm	375/325 N/5cm	120 N/5cm	3m	-30°C / -70°C	B1	PVDF/Acrylic	Architectural Membrane
X10-000009	1200g/m ² 35 OZ/YD ²	1500D 30×32/inch	6000/5500 N/5cm	450/400 N/5cm	120 N/5cm	3m	-30°C / -70°C	B1	PVDF/Acrylic	Architectural Membrane
X10-000010	1350g/m ² 39 OZ/YD ²	2000D 30×32/inch	8000/7500 N/5cm	600/550 N/5cm	120 N/5cm	3m	-30°C / -70°C	B1	PVDF/Acrylic	Architectural Membrane

Please note: This product has a wide range of applications and is not limited above specific model.

