



FLEXIBLE TANKS series

SUITABLE FOR FLEXIBLE TANKS
VARIOUS HARSH ENVIRONMENTS

About Our Customers

We strive to provide you with the highest quality products to satisfy you and build trust with you.

Style and Color



Blue



Green




Orange Color



White



Grey

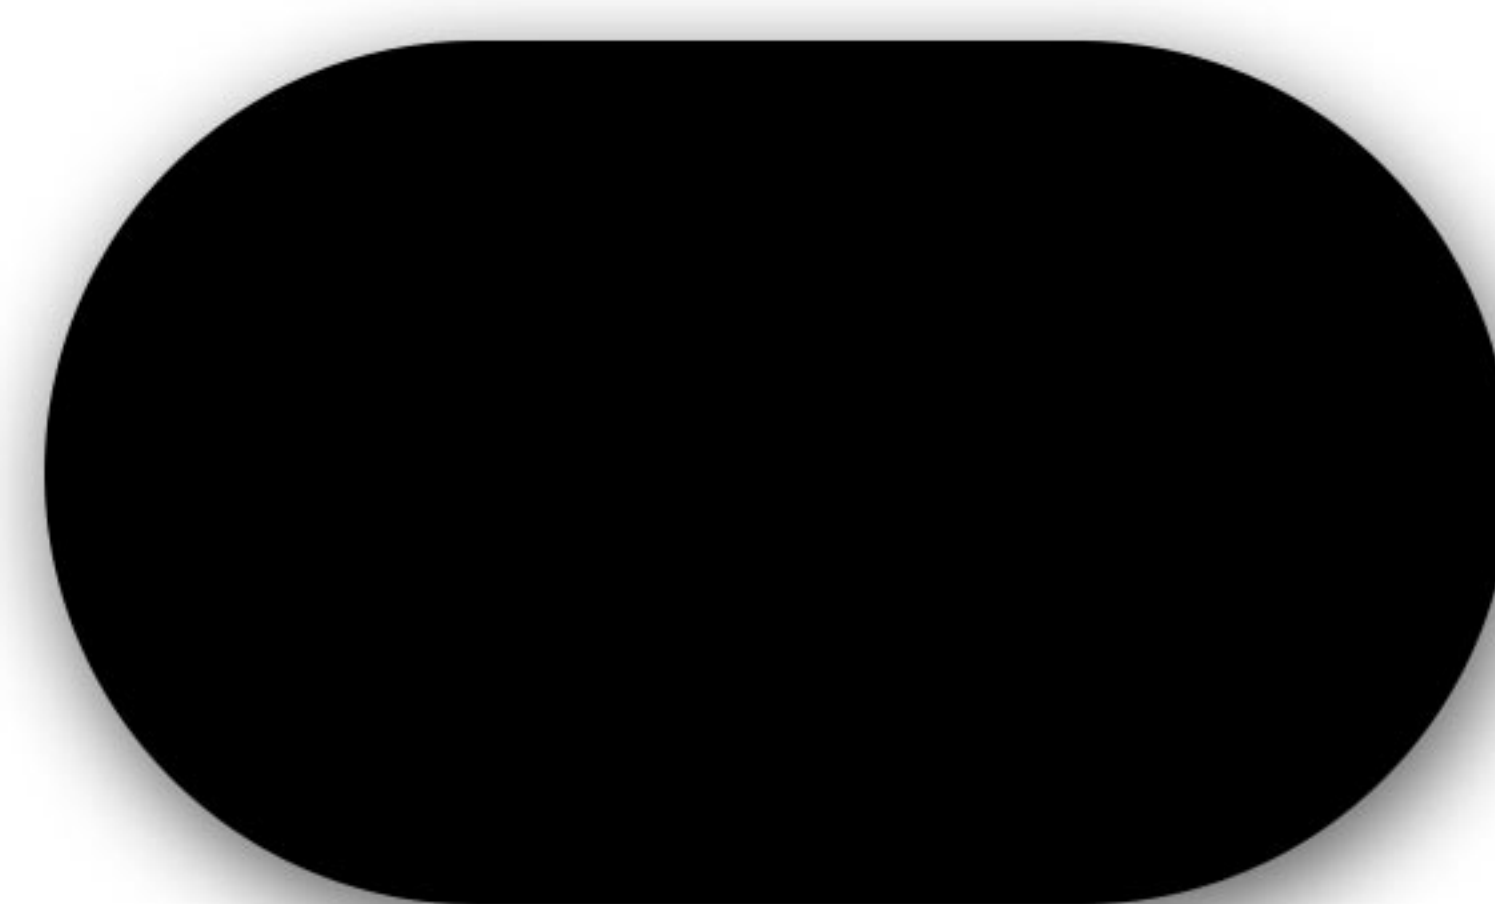

Black

Product Features



UV Resistant



Strong & Durable



Chemical Resistant



Flexible

Technical Parameters

	Total Weight	Base Fabric	Tensile Strength (DIN 53 354)	Tearing Strength (DIN 53 363)	Adhesion (DIN 53 357)	Width	Temperature Resistance	Lacquering	Application
X06-000001	900g/m ² 26 OZ/YD ²	1000×1300D 30×26/inch	3354/3876 N/5cm	263/210 N/5cm	150 N/5cm	1.55/2.1/2.5/ 3.0/3.2m	-30°C / +70°C	PVDF/Acrylic	Water Tank
X06-000100	950g/m ² 28 OZ/YD ²	1300×1300D 30×32/inch	3754/3421 N/5cm	340/298 N/5cm	150 N/5cm	2.5/3.0/3.2m	-30°C / +70°C	PVDF/Acrylic	Water Tank
X06-000010	1050g/m ² 30 OZ/YD ²	1300×1500D 30×26/inch	5907/5165 N/5cm	635/599 N/5cm	150 N/5cm	2.5/3.0/3.2m	-30°C / +70°C	PVDF/Acrylic	Water Tank
X06-000030	1100g/m ² 32 OZ/YD ²	1000×1300D 30×26/inch	3827/3573 N/5cm	383/322 N/5cm	150 N/5cm	2.5/3.0/3.2m	-30°C / +70°C	PVDF/Acrylic	Water Tank
X06-000045	1500g/m ² 44 OZ/YD ²	1300×1500D 30×26/inch	5189/4512 N/5cm	548/527 N/5cm	150 N/5cm	1.55/2.1/2.5/ 3.0/3.2m	-30°C / +70°C	PVDF/Acrylic	Water Tank
X06-000073	2000g/m ² 59 OZ/YD ²	2000D 32×34/inch	9070/9440 N/5cm	610/525 N/5cm	190 N/5cm	1.55/2.1/2.5/ 3.0/3.2m	-30°C / +70°C	PVDF/Acrylic	Water Tank

Please note: This product has a wide range of applications and is not limited above specific model.

